
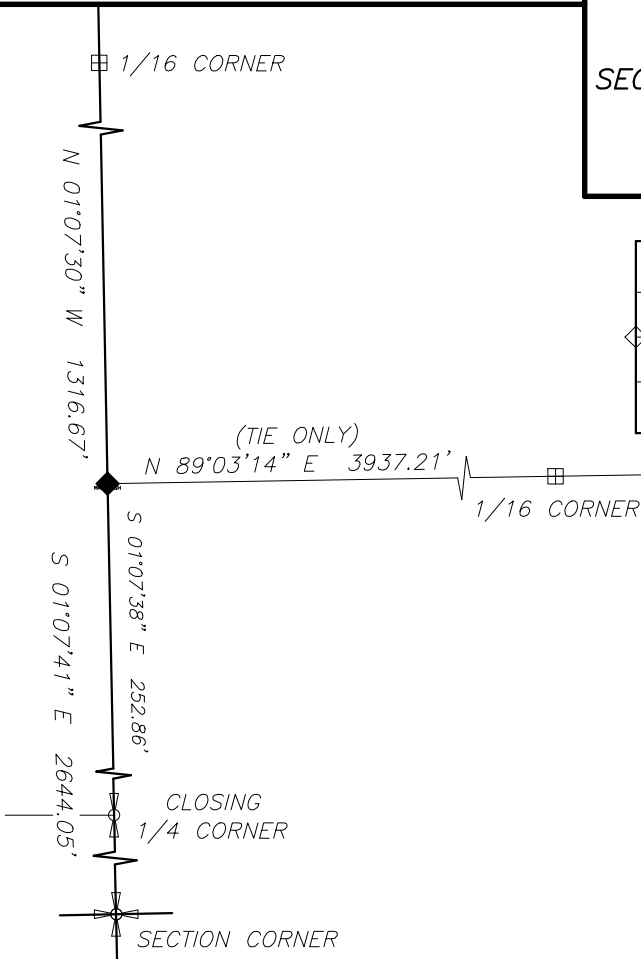


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R2W  
1/4  
SEC 26 | SEC 25  
U.S.B.&M.



NOTE:  
THE SURVEY WAS PERFORMED USING GLOBAL  
POSITIONING SYSTEM (G.P.S.) EQUIPMENT AND  
PROCEDURES. THE BASIS OF BEARINGS IS  
WGS-84 DATUM.

DESCRIPTION OF CORNER EVIDENCE FOUND

POSITION OF CORNER WAS DETERMINED BY SINGLE PROPORTIONATE MEASUREMENT  
BETWEEN SECTION CORNERS

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE  
THE ORIGINAL LOCATION OF THE CORNER

SET A MAG SPIKE WITH BRASS WASHER IN PAVEMENT AT 1/4 CORNER  
REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA  
(U.S. SURVEY FEET)  
NAD 83 UTAH CENTRAL ZONE  
N: 7305721.89  
E: 2039560.11

LATITUDE: 40°22'02.34032" N  
LONGITUDE: 110°04'02.88548" W  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0020W0\_600242

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do  
hereby certify that I have performed or reviewed the work done on the  
diagrammed corner as reported on this recordation form and approve same

Date 17 JAN '17

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

